

BIRCH, STEWART, KOLASCH & BIRCH, LLP

INTELLECTUAL PROPERTY LAW

8110 GATEHOUSE ROAD

SUITE 500 EAST

FALLS CHURCH, VA 22042

USA

(703) 205-8000

FAX: (703) 205-8050

(703) 698-8590 (G IV)

e-mail: mailroom@bskb.com

web: <http://www.bskb.com>

SENIOR COUNSEL:
ANTHONY L. BIRCH

GARY D. YACURA
THOMAS S. AUCHTERLONIE
MICHAEL R. CAMMARATA
JAMES T. ELLER, JR.
SCOTT L. LOWE
JOSEPH H. KIM, PH.D.*
RICHARD S. MYERS, JR.*
MARY ANN CAPRIA
MICHAEL J. CORNELISON*
MARK J. NUEL, PH.D.
ROBERT V. RACUNAS
DARIN E. BARTHOLOMEW*
D. RICHARD ANDERSON
PAUL C. LEWIS
JERRY W. HOGGE

REG. PATENT AGENTS:
FREDERICK R. HANDREN
ANDREW J. TELESZ, JR.
MARYANNE LIOTTA, PH.D.
MAKI HATSUMI
STEVEN P. WIGMORE
ESTHER H. CHIN
MIKE S. RYU
W. KARL RENNER
CRISTINA MCROBBIE
GARTH M. DAHLEN
LAURA C. LUTZ

JC523 U.S. PTO
09/217633



12/22/98

TERRELL C. BIRCH
RAYMOND C. STEWART
JOSEPH A. KOLASCH
JAMES M. SLATTERY
BERNARD L. SWEENEY*
MICHAEL K. MUTTER
CHARLES GORENSTEIN
GERALD M. MURPHY, JR.
LEONARD R. SVENSSON
TERRY L. CLARK
ANDREW D. MEIKLE
MARC S. WEINER
JOE MCKINNEY MUNCY
ROBERT J. KENNEY
C. JOSEPH FARACI
DONALD J. DALEY
JOHN W. BAILEY
JOHN A. CASTELLANO, III

OF COUNSEL:
HERBERT M. BIRCH (1905-1996)
ELLIOT A. GOLDBERG*
WILLIAM L. GATES*
EDWARD H. VALANCE
RUPERT J. BRADY (RET.)*

*ADMITTED TO A BAR OTHER THAN VA

Date: December 22, 1998

Docket No.: 0505-0477P

Assistant Commissioner for Patents
Box PATENT APPLICATION
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): NAKAMORI, Masaharu
OKUBO, Katsunori; YOKOYAMA, Masashi
KATO, Hiroshi

For: METAL CARRIER FOR A CATALYST

Enclosed are:

X A specification consisting of 9 pages

X 4 sheet(s) of Formal drawings

X An assignment of the invention

X Certified copy of Priority Document(s)

X Executed Declaration X Original Photocopy

 A verified statement to establish small entity status under 37
CFR 1.9 and 37 CFR 1.27

 Preliminary Amendment

 Information Disclosure Statement, PTO-1449 and reference(s)

Other _____

The filing fee has been calculated as shown below:

			LARGE ENTITY		SMALL ENTITY	
FOR	NO. FILED	NO. EXTRA	RATE	FEE	RATE	FEE
BASIC FEE	*****	*****	*****		****	
	*****	*****	*****	\$760.00	****	\$380.00
	*****	*****	*****		****	
TOTAL CLAIMS	14 - 20 =	0	x18 = \$	0.00	or x 9 = \$	0.00
INDEPENDENT	2 - 3 =	0	x78 = \$	0.00	or x 39 = \$	0.00
MULTIPLE DEPENDENT CLAIM PRESENTED <u>no</u>			+260 = \$	0.00	or +130 = \$	0.00
			TOTAL \$ 760.00		TOTAL \$ 0.00	

X A check in the amount of \$ 800.00 to cover the filing fee and recording fee (if applicable) is enclosed.

_____ Please charge Deposit Account No. 02-2448 in the amount of \$ _____. A triplicate copy of this transmittal form is enclosed.

_____ No fee is enclosed.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. 1.16 or under 37 C.F.R. 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By _____

James M. Slattery
 JAMES M. SLATTERY
 Reg. No. 28,380
 P. O. Box 747
 Falls Church, Virginia 22040-0747

(703) 205-8000
 JMS/sas

METAL CARRIER FOR A CATALYST

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a metal carrier for a catalyst, and more particularly
5 to an improvement in a metal carrier for a catalyst comprising a honeycomb structure which
is in a cylindrical form and has plural air vents extending in its axial direction, and a
cylindrical case covering the periphery of the honeycomb structure.

Description of Background Art

Such a type of metal carrier is fitted to an exhausting system of a vehicle in a state
10 where a catalyst for cleaning exhaust gas is formed on the honeycomb structure of the
catalyst.

For example, in motorcycles, particularly motorcycles wherein a small size, namely
a 2-cycle engine is mounted, the metal carrier is fitted to the inside of a muffler. This
mounting is due to a restriction in the arrangement thereof and the like. Thus, an opening
15 portion at one end of the metal carrier case is welded to the outlet of the exhaust pipe. For

this reason, the metal carrier is exposed to a high temperature of, for example, 900° C or higher.

In this case, the honeycomb structure is covered with a catalyst layer and thus oxidation thereof does not come into question very much. However, the periphery of the case is exposed and, in consequence, oxidation thereof rapidly advances when the case is exposed to high temperature. In other words, abnormal oxidation may be introduced.

SUMMARY AND OBJECTS OF THE INVENTION

An object of the present invention is to provide a metal carrier for a catalyst, in which high temperature oxidation resistance of the metal carrier case is greatly improved.

According to the present invention, in order to attain the object, a metal carrier is provided for a catalyst comprising a honeycomb structure that is in a cylindrical form and has plural air vents extending in an axial direction of the metal carrier. A cylindrical case covers the periphery of the honeycomb structure. The cylindrical case is composed of ferritic stainless steel containing Mo.

Specifying the material of the case as being ferritic stainless steel containing Mo causes high temperature oxidation resistance of the case to be greatly improved, and makes it possible to avoid abnormal oxidation thereof.

Further scope of applicability of the present invention will become apparent from the detailed description given hereinafter. However, it should be understood that the detailed description and specific examples, while indicating preferred embodiments of the invention, are given by way of illustration only, since various changes and modifications within the spirit and scope of the invention will become apparent to those skilled in the art from this detailed description

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will become more fully understood from the detailed description given hereinbelow and the accompanying drawings which are given by way of illustration only, and thus are not limitative of the present invention, and wherein:

Figure 1 is a perspective view of a cleaner for exhaust gas;

Figure 2 is an enlarged cross-sectional view of an important portion in Fig. 1;

Figure 3 is a graph showing an example of the relationship between heating temperature and oxidation increase;

Figure 4 is a graph showing another example of the relationship between heating temperature and oxidation increase; and

5 Figure 5 is a cross-sectional view of an important portion showing the arrangement relationship among an exhaust pipe, a muffler and a cleaner.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

In Figs. 1 and 2, a cleaner 1 for exhaust gas that is fitted to an exhausting system of a motorcycle is composed of a metal carrier 2 for a catalyst and a catalyst layer 3 carried
10 thereon. The metal carrier 2 has a honeycomb structure 5 which is in a cylindrical form and has plural air vents 4 extending in the axial direction of the metal carrier 2. A cylindrical case 6 covers the periphery of the honeycomb structure 5. In this embodiment, the plural air vents 4 existing at the outermost position of the honeycomb structure 5 are formed by cooperation of the inner face of the case 6 and a waved plate 7 of the honeycomb structure
15 5. The catalyst layer 3 is formed or carried on the honeycomb structure 5 after sintering treatment of the inner face of the respective air vents 4.

The waved plates 7 and base plates 8 of the honeycomb structures are made of ferritic stainless steel, for example, widely used ferritic stainless steel containing no Mo.

The case 6 is composed of a seam welded pipe comprising ferritic stainless steel
20 containing Mo. The Mo content in this ferritic stainless steel is preferably set into the range of $0.30 \text{ wt } \% \leq \text{Mo} \leq 2.50 \text{ wt } \%$.

Specifying the material of the case 6 as above causes a great improvement in to resist high temperature oxidation of the case 6 and makes it possible to avoid abnormal oxidation thereof. Besides, since the material of the case 6 is the same as that of the
25 honeycomb structures, a difference in the coefficient of linear expansion between the case and the honeycomb structures is small, thereby greatly suppressing thermal deformation of the case 6 based on the difference. In addition, when the case 6 is welded to the outlet of the exhaust pipe, weldability thereof is increased.

Concerning the Mo content, in the case of $\text{Mo} < 0.30 \text{ wt } \%$, the effect of high
30 temperature oxidation resistance of the case 6 is somewhat insufficient. On the other hand,

in the case of $\text{Mo} > 2.50\text{wt}\%$, the Mo content is remarkably larger than ordinary standardized materials, thereby raising material cost. Thus, such a material is unsuitable for a constituting material of the cases for mass production.

The following will explain the high temperature oxidation resistance of the material constituting the case 6, and practical vehicle endurance tests.

[1] High temperature oxidation resistance

Table 1 shows compositions of Examples 1-3 of ferritic stainless steel.

TABLE 1

Ferritic stainless steel	Chemical components (wt%)									
	C	Si	Mn	P	S	Cr	Ti	Mo	Cu	Nb
Example 1	0.005	0.06	0.12	0.030	0.004	17.33	0.21	1.20	---	---
Example 2	0.05	0.28	0.13	0.025	0.01	0.01	---	---	---	---
Example 3	0.02	0.04	0.19	0.023	0.003	0.003	---	---	0.46	0.44

In Examples 1-3, test pieces having a thickness of 1.0 mm and the same surface area were produced, and then the test pieces were set inside a heating furnace under atmospheric pressure. The heating temperature was then raised to a predetermined value, and the raised temperature was maintained for 20 hours. Subsequently, the oxidation increase (wt %) of the respective test pieces was obtained. This measuring operation was repeated for a given number of times.

Figure 3 shows the results of the measurement. In this figure, Examples 1 - 3 correspond to Examples 1 - 3 in Table 1, respectively. As shown in Fig. 3, when the heating temperature was over about 800°C , oxidation in Examples 1 -3 started. However, in the case of Example 1, which contained Mo, the oxidation increase was merely about 0.57 wt% even at a heating temperature of 1000°C . This made it clear that Example 1 had an excellent high temperature oxidation resistance. On the other hand, abnormal oxidation arose at a heating temperature of about 900°C or more in Example 2, and at a temperature of about 950°C or more in Example 3, respectively.

Next, the inside of the furnace was maintained in a moisture added atmosphere and then the same measuring operation as above was repeated for a given number of times. In this case, the moisture added atmosphere comprised a 90 vol % of a mixture gas (0.5 vol % of oxygen and the balance of nitrogen) and a 10 vol % of water.

Figure 4 shows the results of the measurement. In Figure 4, Examples 1 - 3 corresponds to Examples 1 - 3 in Table 1, respectively. As shown in Fig. 4, in the case of Example 1, that contained Mo, the increase in the oxidation of the case was about 0.48 wt % at a heating temperature of 950°C. This made it clear that Example 1 also had an excellent high temperature oxidation resistance in the moisture added atmosphere. On the other hand, abnormal oxidation arose at a heating temperature of about 900°C or more in Examples 2 and 3.

[II] Practical vehicle endurance test

A catalyst layer 3 having a noble metal such as platinum was carried on the metal carrier 2 for a catalyst having the case 6 made of Example 1. In this way, the cleaner 1 of Example 1 was obtained. The same catalyst layer 3 as above was formed or carried on two kinds of metal carriers 2 for a catalyst which had the case 6 and were made of Examples 2 and 3 to obtain the cleaners 1 of Examples 2 and 3.

As shown in Fig. 5, in an exhausting system of a small size 2-cycle engine mounted on a motorcycle, an opening portion at one end of the case 6 was welded to the outlet of the exhaust pipe 9 so that the metal carrier 2, that is, the cleaner 1 of Example 1 was positioned inside the muffler 10. The engine was then driven for a specified period, and subsequently the state of the case 6 was examined. During the driving of the engine, the temperature inside the muffler 10 at a distance of 20 cm behind the cleaner 1 was about 900°C. The same test was carried out for the cleaners of Examples 2 and 3

Table 2 shows the results of the test.

TABLE 2

Cleaner	State of the case after the test	
	Abnormal oxidation	Deformation
Example 1	No outbreak	Almost none
Example 2	Outbreak in its whole	Large
Example 3	Outbreak in its part	Small

From Table 2, it can be understood that the case 6 of the cleaner 1 of Example 1 had an excellent high temperature oxidation resistance and good deformation resistance. Thus, the exhaust gas cleaning ability of Example 1 is maintained for a long time.

From Table 2, it is also clear that the cleaners 1 of Examples 2 and 3 were not practical. In particular, the catalyst layer 3 of Example 2 was subjected to EPMA (XMA) analysis. As a result, a portion 3a (see Fig. 2), of the catalyst layer 3, adhering to the inner face of the case 6 was covered with an oxide resulting from abnormal oxidation, and further an Fe component was detected at a portion 3b (see Fig. 2), of the catalyst layer 3, adhering to the honeycomb structure 5. The exhaust gas cleaning ability of this cleaner 1 of Example 2 was greatly reduced, as compared with its initial value.

According to the present invention, a metal carrier for a catalyst is provided wherein high temperature oxidation resistance of its case is greatly improved by the aforementioned structure.

The invention being thus described, it will be obvious that the same may be varied in many ways. Such variations are not to be regarded as a departure from the spirit and scope of the invention, and all such modifications as would be obvious to one skilled in the art are intended to be included within the scope of the following claims.

WE CLAIM:

- 1 1. A metal carrier for a catalyst comprising:
2 a honeycomb structure shaped in a cylindrical form, said honeycomb structure
3 having a plurality of air vents extending in an axial direction thereof; and
4 a cylindrical case covering an outer peripheral surface of the honeycomb structure,
5 wherein the cylindrical case is composed of ferritic stainless steel containing Mo.
- 1 2. The metal carrier for a catalyst according to claim 1, wherein the Mo content in
2 the ferritic stainless steel is in the range of $0.30 \text{ wt}\% \leq \text{Mo} \leq 2.50 \text{ wt}\%$.
- 1 3. The metal carrier for a catalyst according to claim 1, and further including a
2 muffler housing wherein said cylindrical case is disposed within said muffler housing and is
3 displaced a predetermined distance relative to an interior wall of the muffler housing to
4 form a space therebetween.
- 1 4. The metal carrier for a catalyst according to claim 1, wherein the honeycomb
2 structure is constructed of ferritic stainless steel that does not contain Mo.
- 1 5. The metal carrier for a catalyst according to claim 1, wherein the Mo content is
2 1.20 wt%.
- 1 6. The metal carrier for a catalyst according to claim 1, and further including a
2 catalyst layer of a noble metal formed on the honeycomb structure.
- 1 7. The metal carrier for a catalyst according to claim 6, wherein the noble metal is
2 platinum.

1 8. A metal carrier for a catalyst comprising:
2 a honeycomb structure having a catalyst layer formed thereon, said honeycomb
3 structure having a plurality of air vents extending in a flow direction through the
4 honeycomb structure; and
5 a cylindrical case covering an outer surface of the honeycomb structure, wherein the
6 cylindrical case is composed of ferritic stainless steel containing Mo.

1 9. The metal carrier for a catalyst according to claim 8, wherein the Mo content in
2 the ferritic stainless steel is in the range of $0.30 \text{ wt\%} \leq \text{Mo} \leq 2.50 \text{ wt\%}$.

1 10. The metal carrier for a catalyst according to claim 8, and further including a
2 muffler housing wherein said cylindrical case is disposed within said muffler housing and is
3 displaced a predetermined distance relative to an interior wall of the muffler housing to
4 form a space therebetween.

1 11. The metal carrier for a catalyst according to claim 8, wherein the honeycomb
2 structure is constructed of ferritic stainless steel that does not contain Mo.

1 12. The metal carrier for a catalyst according to claim 8, wherein the Mo content is
2 1.20 wt%.

1 13. The metal carrier for a catalyst according to claim 8, wherein the catalyst layer
2 is a noble metal formed on the honeycomb structure.

1 14. The metal carrier for a catalyst according to claim 13, wherein the noble metal is
2 platinum.

ABSTRACT OF THE DISCLOSURE

5 A metal carrier for a catalyst having a cylindrical case with an excellent high temperature oxidation resistance. A metal carrier for the catalyst includes a honeycomb structure which is in a cylindrical form and has plural air vents extending in an axial direction. The cylindrical case covers the periphery of the honeycomb structure. The cylindrical case is made of ferritic stainless steel containing Mo. The present invention makes it possible to avoid the occurrence of abnormal oxidation of the cylindrical case at high temperature.

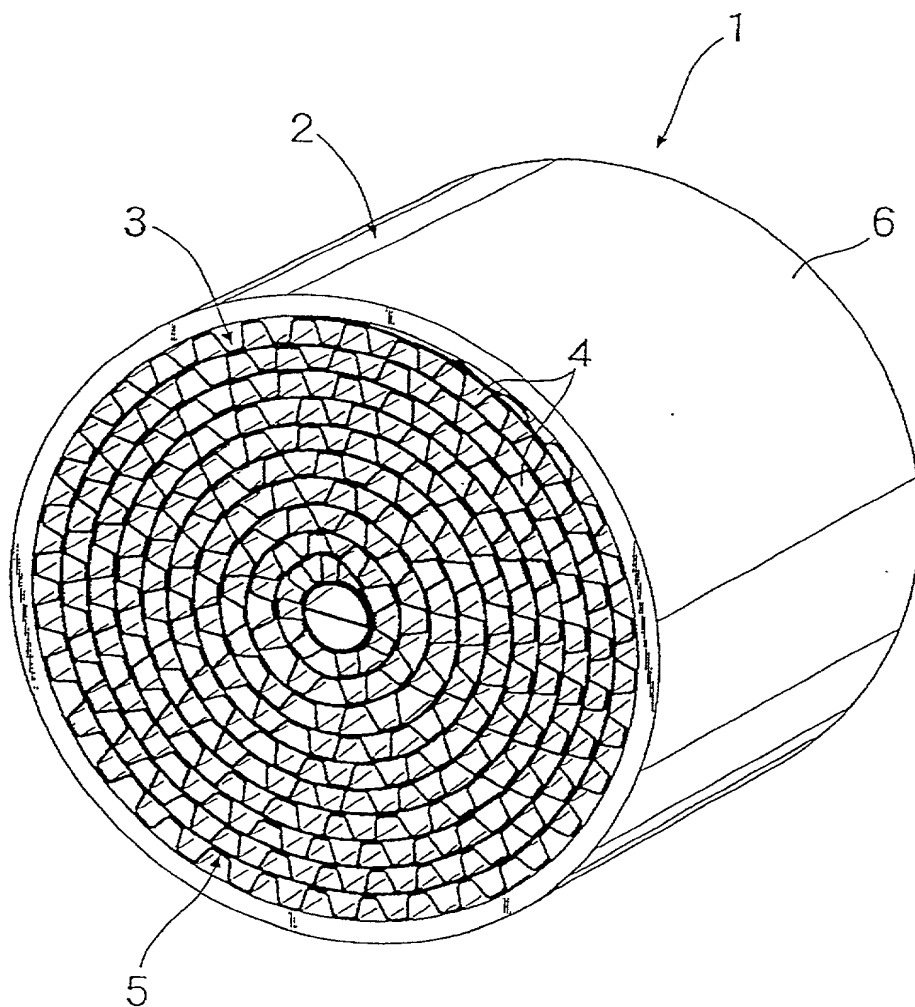


Fig. 1

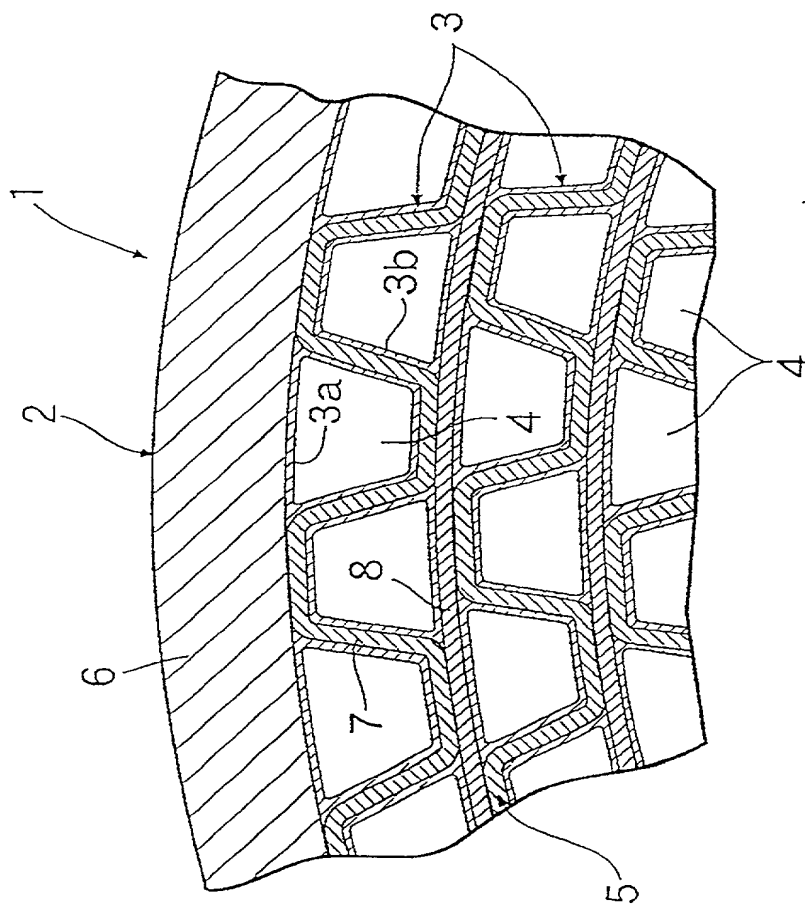


Fig. 2

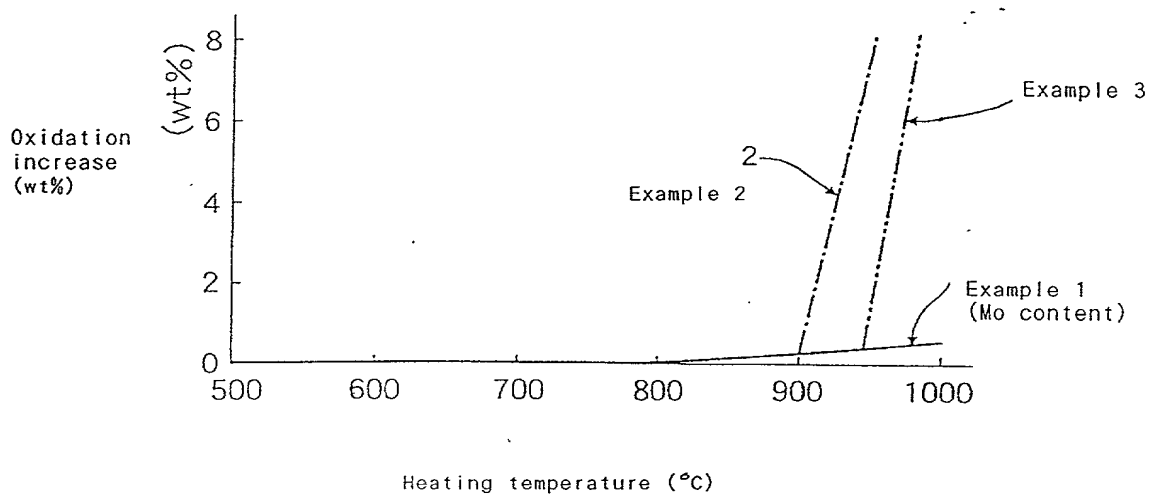


Fig. 3

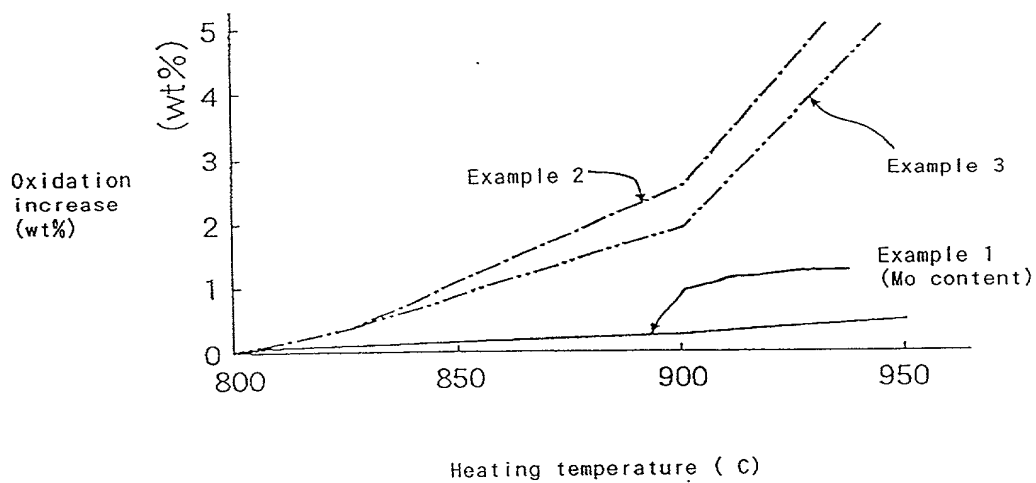


Fig. 4

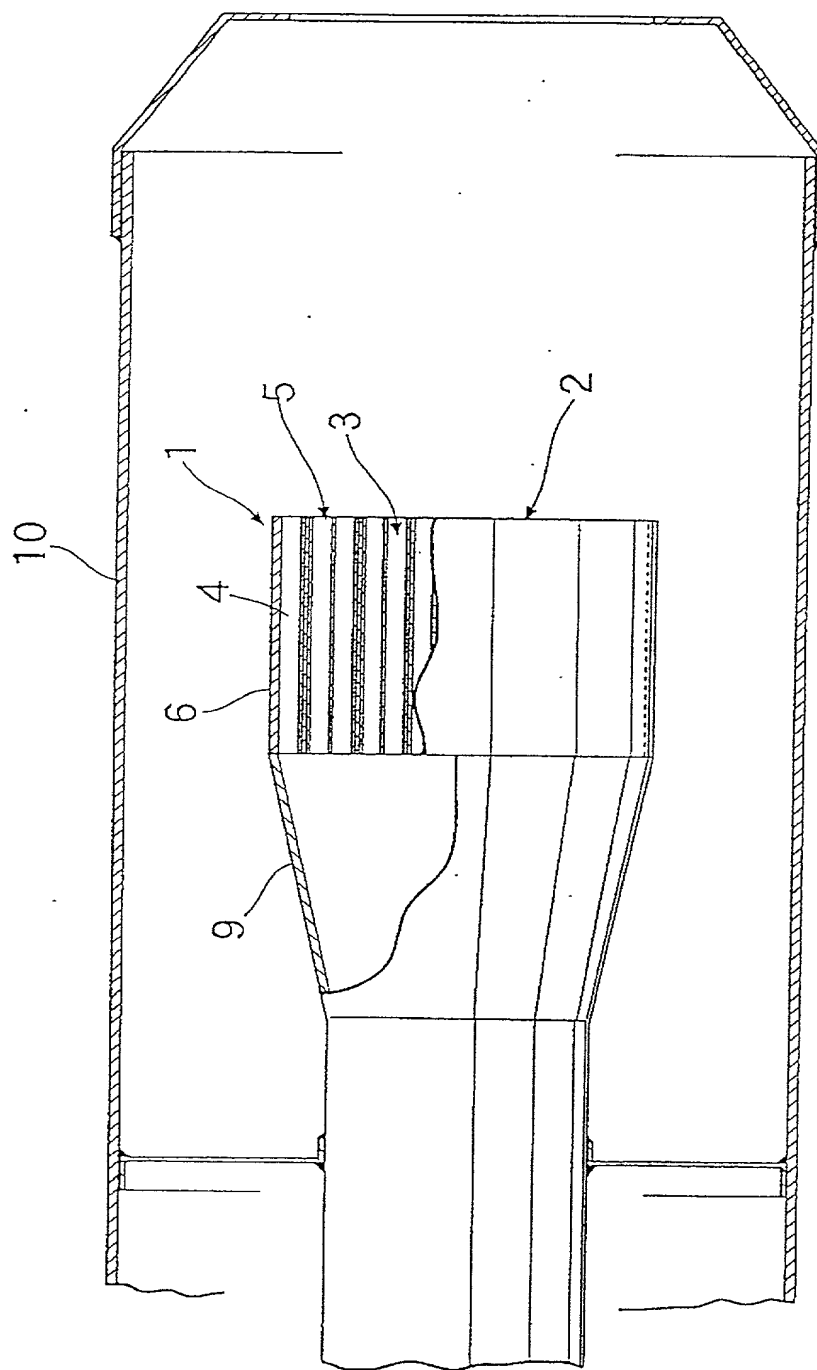


Fig. 5

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Attorney Docket No.:
0505-0477P

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METAL CARRIER FOR A CATALYST

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
（該当する場合） _____ に訂正されました。

☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Burden Hour Statement This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner of Patents and Trademarks, Washington, DC 20231.

Japanese Language Declaration

(日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願

Hei-10-002302

(Number)
(番号)

JAPAN

(Country)
(国名)(Number)
(番号)(Country)
(国名)

私と、第35編米国法典119条(e)項に基づいて下記の米国外の特許出願規定に記載された権利をここに主張いたします。

(Application No.)
(出願番号)(Filing Date)
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外の特許出願に記載された権利、又は米国外を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外の特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)
(出願番号)(Filing Date)
(出願日)(Application No.)
(出願番号)(Filing Date)
(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

08/01/1998

(Day/Month/Year Filed)
(出願年月日)☒(Day/Month/Year Filed)
(出願年月日)☐

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)
(出願番号)(Filing Date)
(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status Patented, Pending, Abandoned)
(現況：特許許可済、係属中、放棄済)(Status Patented, Pending, Abandoned)
(現況：特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Japanese Language Declaration

(日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の
手続を米特許商標局に対して遂行する弁理士または代理人
として、下記の者を指名いたします。(弁護士、または代理
人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint
the following attorney(s) and/or agent(s) to prosecute this
application and transact all business in the Patent and Trademark
Office connected therewith (list name and registration number)

TERRELL C. BIRCH (Reg. No. 19,382)
JOSEPH A. KOLASCH (Reg. No. 22,463)
BERNARD L. SWEENEY (Reg. No. 24,448)
CHARLES GORENSTEIN (Reg. No. 29,271)
LEONARD C. SVENSSON (Reg. No. 30,330)
ANDREW D. MEIKLE (Reg. No. 32,868)
JOE M. MUNCY (Reg. No. 32,334)
DONALD J. DALEY (Reg. No. 34,313)
JOHN A. CASTELLANO (Reg. No. 35,094)

RAYMOND C. STEWART (Reg. No. 21,066)
JAMES M. SLATTERY (Reg. No. 28,380)
MICHAEL K. MUTTER (Reg. No. 29,680)
GERALD M. MURPHY (Reg. No. 28,977)
TERRY L. CLARK (Reg. No. 32,644)
MARC S. WEINER (Reg. No. 32,181)
C. JOSEPH FARACI (Reg. No. 32,350)
JOHN W. BAILEY (Reg. No. 32,881)

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: Telephone: (703) 205-8000
Facsimile: (703) 205-8050

書類送付先

Send Correspondence to:

BIRCH, STEWART, KOLASCH & BIRCH, LLP
P.O. Box 747
Falls Church, Virginia 22040-0747

唯一または第一発明者名	Full name of sole or first inventor	
	Masaharu NAKAMORI	
発明者の署名	Inventor's signature	Date
日付	Masaharu Nakamori	Dec. 18, 1998
住所	Residence	
	Saitama, JAPAN	
国籍	Citizenship	
	Japanese	
私書箱	Post Office Address	
	4-1, Chuo 1-chome, Wako-shi, Saitama	
	Japan	
第二共同発明者	Full name of second joint inventor, if any	
	Katsunori OKUBO	
第二共同発明者	Second inventor's signature	Date
日付	Katsunori Okubo	Dec. 18, 1998
住所	Residence	
	Saitama, JAPAN	
国籍	Citizenship	
	Japanese	
私書箱	Post Office Address	
	4-1, Chuo 1-chome, Wako-shi, Saitama	
	Japan	

(第三以降の共同発明者についても同様に記載し、署名をす
ること)

(Supply similar information and signature for third and subsequent
joint inventors.)

第七の共同発明者の氏名 (該当する場合)		Full name of seventh joint inventor, if any	
		Masashi YOKOYAMA	
同第七発明者の署名	日付	Seventh inventor's signature	Date
		Masashi Yokoyama	Dec.18,1998
住所		Residence	
		Saitama, JAPAN	
国籍		Citizenship	
		Japanese	
郵便の宛先		Post office address	
		4-1, Chuo 1-chome, Wako-shi, Saitama, Japan	
第八の共同発明者の氏名 (該当する場合)		Full name of eighth joint inventor, if any	
		Hiroshi KATO	
同第八発明者の署名	日付	Eighth inventor's signature	Date
		Hiroshi Kato	Dec.18,1998
住所		Residence	
		Saitama, JAPAN	
国籍		Citizenship	
		Japanese	
郵便の宛先		Post office address	
		4-1, Chuo 1-chome, Wako-shi, Saitama, Japan	
第九の共同発明者の氏名 (該当する場合)		Full name of ninth inventor, if any	
同第九発明者の署名	日付	Ninth inventor's signature	Date
住所		Residence	
国籍		Citizenship	
郵便の宛先		Post office address	
第十の共同発明者の氏名 (該当する場合)		Full name of tenth joint inventor, if any	
同第十発明者の署名	日付	Tenth inventor's signature	Date
住所		Residence	
国籍		Citizenship	
郵便の宛先		Post office address	